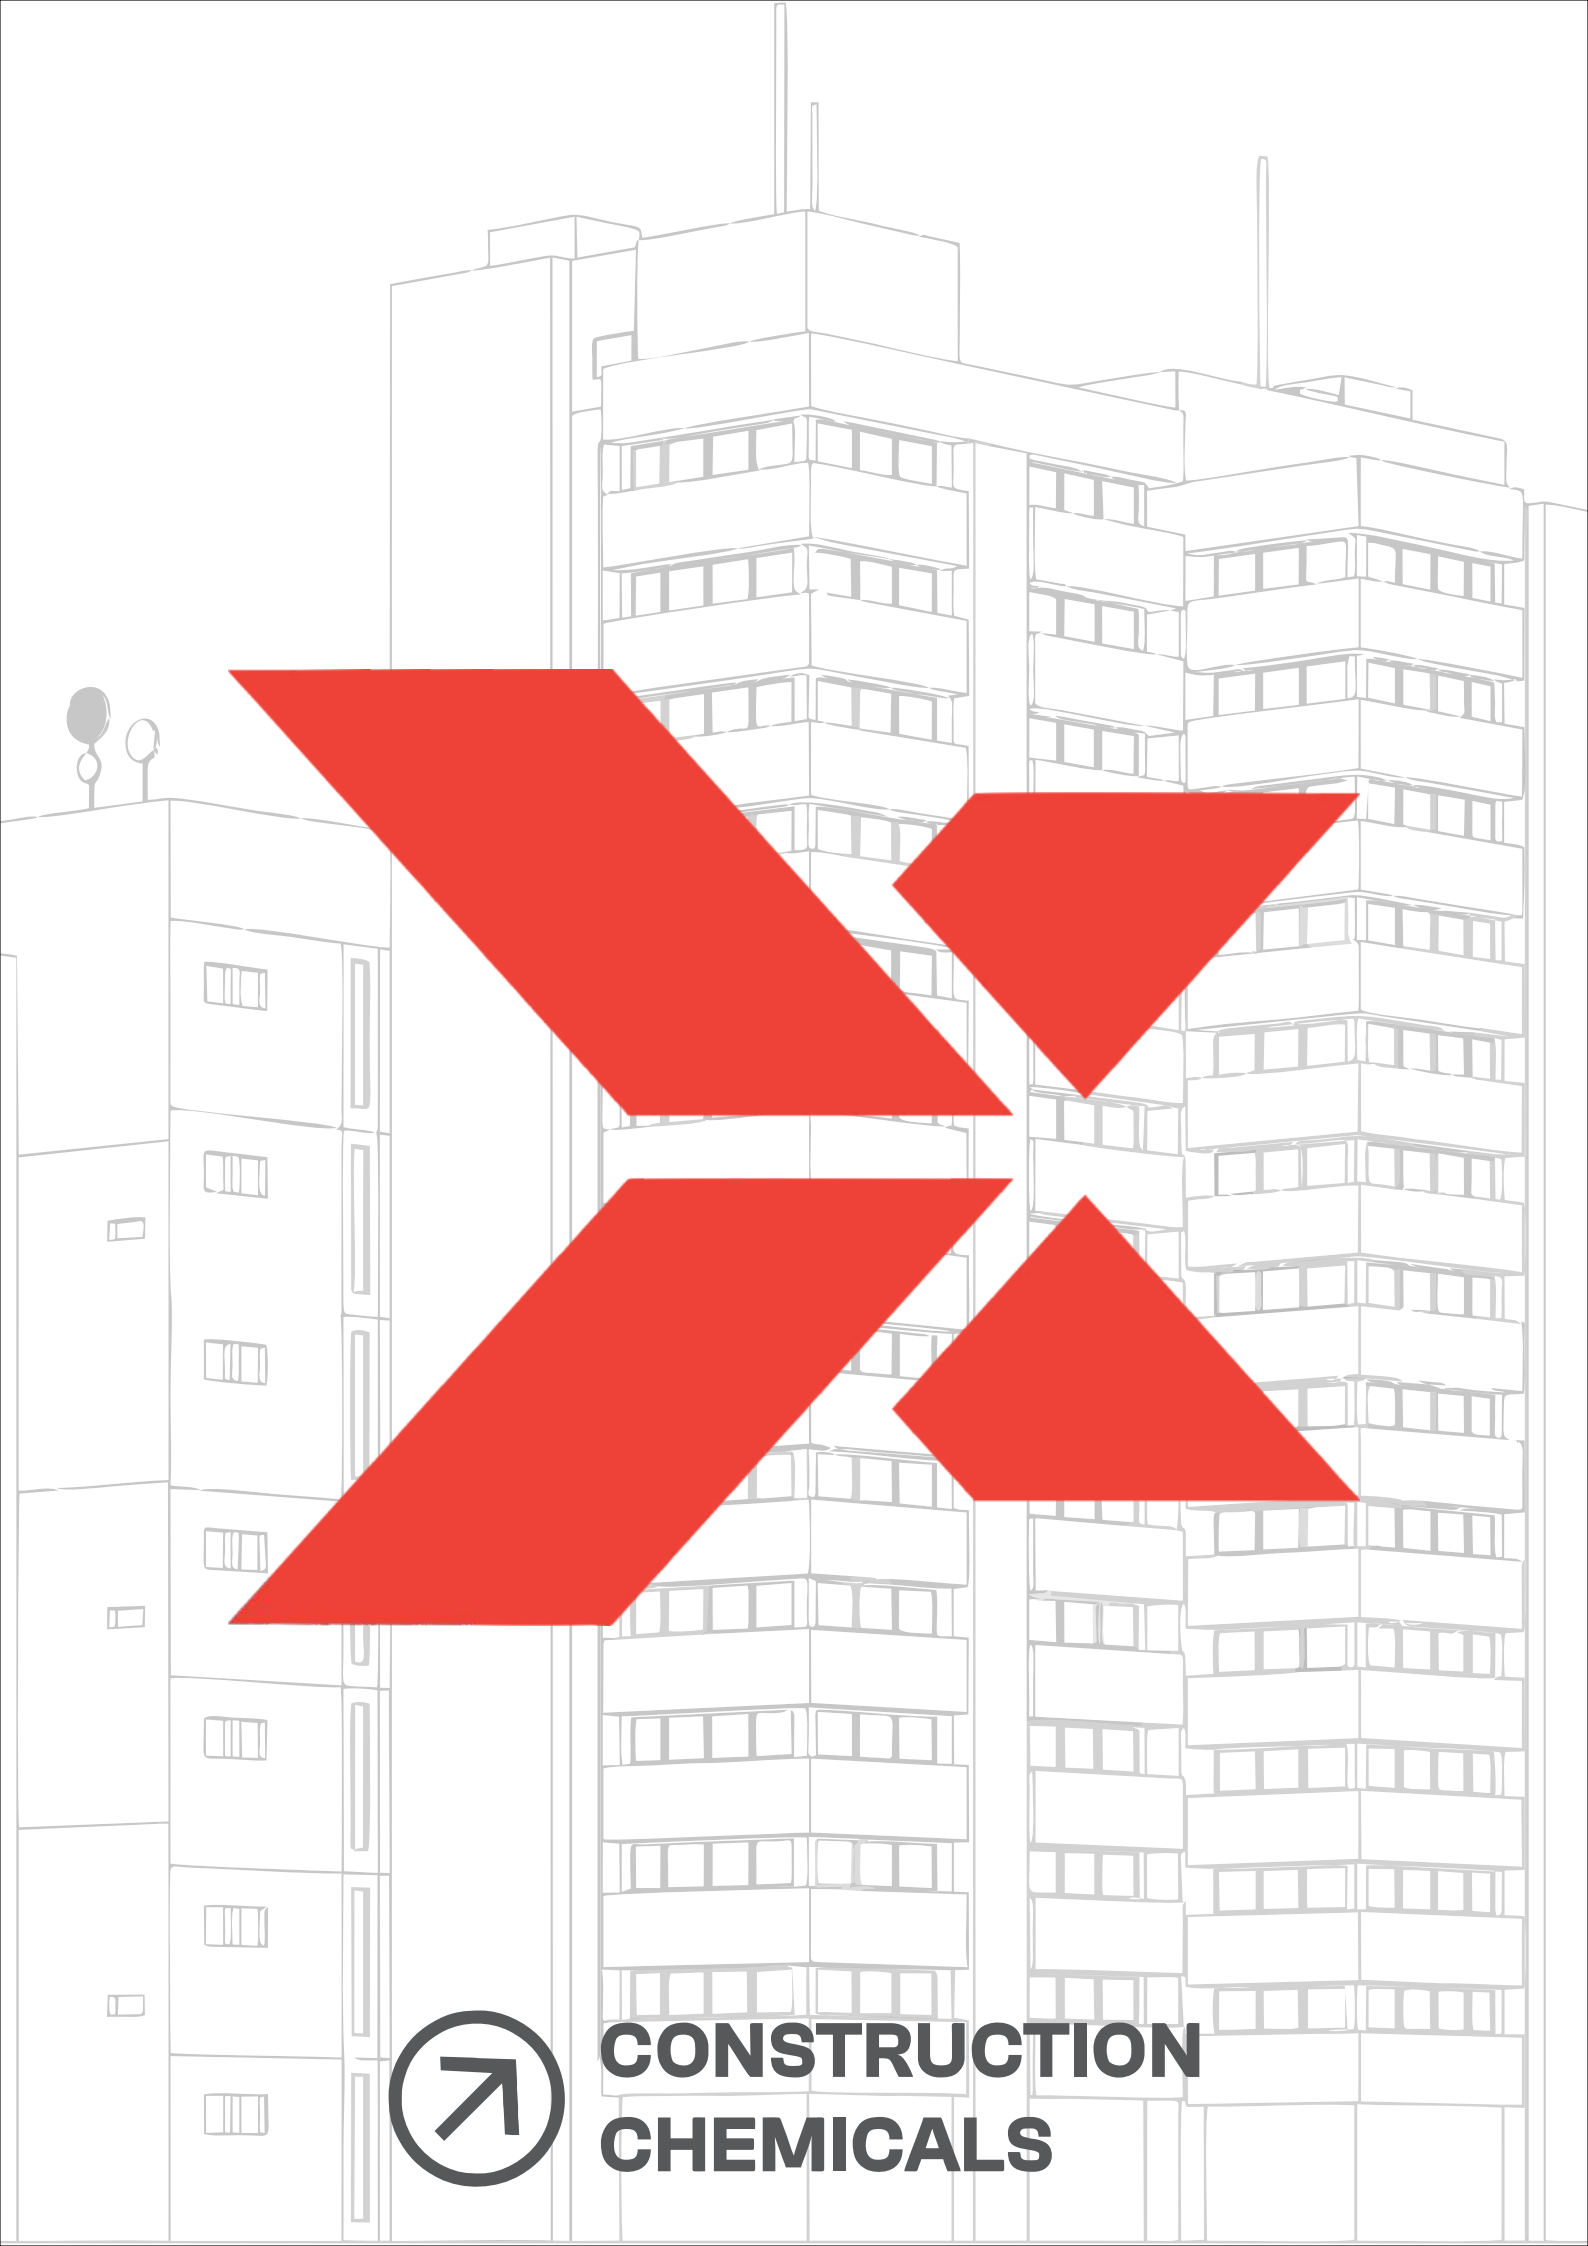


CONSTRUCTION
CHEMICALS

Trusted by Professionals.

What makes us different?

Engineered for Indian Conditions.
Industry-Aligned Standards.
Innovation at Core.
End-to-End Solutions.
Support That Stays With You.

We don't just sell chemicals,
We provide solutions that last.

FIXUP



Tile & Stone Adhesive

TECHNICAL DATA SHEET

TFIX-F1(GREY)

Polymer Modified Adhesive for Ceramic Tiles



Description

Fixup® TFIX-F1 is a single component tile adhesive consists of distinguished blend of cement, well graded minerals and high content of modified polymers that forms when mixed with water an outstanding tile adhesive that capable for fixing ceramic tiles on all common construction substrates internally.

Features and Benefits

- Ideal for Ceramic & Clay Tiles
- Strong Bonding Strength.
- Cost-Effective Solution.
- Smooth Workability
- Easy to use.
- Versatile Application

Instructions for Use

- Ensure substrate is clean, dry, and free from dust, grease, and contaminants.
- Add adhesive to water at a ratio of 1:4 by weight. Mix until a smooth, lump-free consistency is achieved.
- Apply adhesive evenly to the substrate using a notched trowel for full coverage.
- Press tiles firmly into adhesive, ensuring uniform contact and proper alignment.
- Allow adhesive to cure for at least 24 hours before permitting light foot traffic.
- After full curing, apply suitable grout to fill joints.

Technical Data

Appearance	Grey Powdered Mixture
Adjustability	~15 ± 5 minutes
Open Time	~20 ±5 minutes
Pot Life	~45 ±15 minutes
Shear Adhesion	> 1.0 N/mm2 (Dry Condition - 28 Days)
Tensile Adhesion	> 0.5 N/mm2 (Dry Condition - 28 Days)
Time to Traffic	~24 Hours
Water Demand	~25% ±5% by weight of Powder
Shelf Life	12 months from the date of manufacturing
Coverage	~50 - 60 square feet / 25 kg bag (For, 3 mm bed thickness)

Safety & Precautions


- Store in cool & dry place.
- Avoid contact with skin and eyes. In case of contact, rinse thoroughly with water and seek medical advice if necessary. Keep out of reach of children.
- Ensure good ventilation when using the product.
- Use gloves and eye protection when handling the product.

Disclaimer-Fixup products and recommendations are provided in good faith based on our experience, but they should be treated as indicative only. Users must confirm product suitability for their specific application, as site conditions and workmanship are beyond our control. Final responsibility for results rests solely with the user. For the latest TDS, visit www.fixup.co.in.

TECHNICAL DATA SHEET

TFIX-F2(GREY)

High Quality Versatile Adhesive for Tiles on tile Application

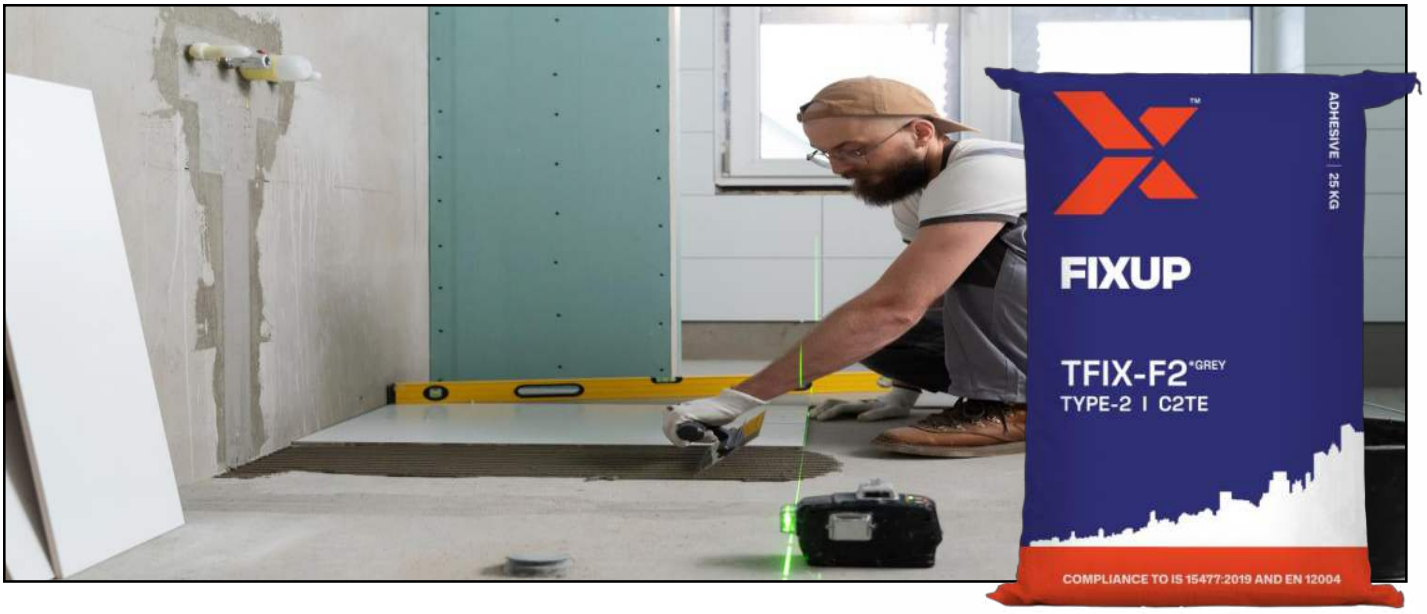

Description

Fixup® TFIX-F2 is a single component, specially formulated tile adhesive consists of distinguished blend of cement, well graded minerals and high content of modified polymers that forms when mixed with water an outstanding tile adhesive for repairing & renovation works and fixing of all types of ceramic tiles and vitrified tiles on all common construction substrates internally or externally.

Features and Benefits

- For external and internal use.
- Extended open time
- Superior workability.
- Can be used with thin and medium bed.

Instructions for Use

- Ensure substrate is clean, dry, and free from dust, grease, and contaminants.
- Add adhesive to water at a ratio of 1:4 by weight. Mix until a smooth, lump-free consistency is achieved.
- Apply adhesive evenly to the substrate using a notched trowel for full coverage.
- Press tiles firmly into adhesive, ensuring uniform contact and proper alignment.
- Allow adhesive to cure for at least 24 hours before permitting light foot traffic.
- After full curing, apply suitable grout to fill joints.

Technical Data

Appearance	Grey powdered mixture
Adjustment Time	~20 ± 5 minutes
Open Time	~30 ± 5 minutes
Pot Life	~60 ± 15 minutes
Shear Adhesion	>1.25 N/mm² @ 28 Days (Dry Condition)
Tensile Adhesion	>1.0 N/mm2 @ 28 Days (Dry Condition)
Time to Traffic	~24 Hours
Water Demand	~25 ± 5% by weight of powder
Shelf Life	12 months from the date of manufacturing
Coverage	~50 - 60 square feet /25 kg bag (For, 3 mm bed thickness)

Safety & Precautions

- Store in cool & dry place.
- Avoid contact with skin and eyes. In case of contact, rinse thoroughly with water and seek medical advice if necessary.
- Use gloves and eye protection when handling the product.

Disclaimer-Fixup products and recommendations are provided in good faith based on our experience, but they should be treated as indicative only. Users must confirm product suitability for their specific application, as site conditions and workmanship are beyond our control. Final responsibility for results rests solely with the user. For the latest TDS, visit www.fixup.co.in.

TECHNICAL DATA SHEET

TFIX-F3$^{(GREY)}$ / TFIX-F4$^{(WHITE)}$

Highly Polymerized, Grey / White Glass Mosaic and Stone Adhesive



Description

Fixup® TFIX-F3$_{(GREY)}$ /TFIX-F4$_{(WHITE)}$ is a single component, high performance tile adhesive consists of distinguished blend of cement, well graded minerals and high content of modified polymers that forms when mixed with water an outstanding tile adhesive that capable for fixing all types of large ceramic tiles and natural stone on all common construction substrates internally or externally.

Features and Benefits

- Shrinkage and crack resistance
- Ultimate stability & dual bonding strength
- No vertical slip
- Extended open time
- Shock & impact resistance
- Superior workability

Instructions for Use

- Clean and prepare the substrate, ensuring it is free from dust, dirt, and other contaminants.
- Mix the adhesive with water at a ratio of 1:4 by weight.
- Mix thoroughly until a smooth, lump-free consistency is achieved.
- Apply the adhesive to the substrate using a notched trowel, ensuring full coverage.
- Lay the tiles into the adhesive, pressing firmly and ensuring they are level.
- Allow the adhesive to dry for at least 24 hours before allowing light foot traffic.
- Grout the tiles using a suitable grout after the adhesive has fully cured.

Technical Data

Appearance	Grey/White Powdered Mixture
Adjustment Time	~20 ± 5 minutes
Open Time	~30 ± 5 minutes
Pot Life	~60 ± 30 minutes
Shear Adhesion	1.5 N/mm^2 @ 28 days (Dry condition)
Tensile Adhesion	1.5 N/mm^2 @ 28 days (Dry condition)
Time to Traffic	~24 Hours
Water Demand	~25 ± 5% by weight
Shelf Life	12 months from the date of manufacturing
Coverage	~50 - 60 square feet /25 kg bag (For, 3 mm bed thickness)

Safety & Precautions

- Store in cool & dry place.
- Avoid contact with skin and eyes. In case of contact, rinse thoroughly with water and seek medical advice if necessary.
- Ensure good ventilation when using the product.
- Use gloves and eye protection when handling the product.

Disclaimer-Fixup products and recommendations are provided in good faith based on our experience, but they should be treated as indicative only. Users must confirm product suitability for their specific application, as site conditions and workmanship are beyond our control. Final responsibility for results rests solely with the user. For the latest TDS, visit www.fixup.co.in.

TECHNICAL DATA SHEET

TFIX-F5$^{(GREY)}$ / TFIX-F6$^{(WHITE)}$

Premium Grade Super Flex, White/Grey Large Tile/Stone Adhesive



Description

Fixup® TFIX-F5$_{(GREY)}$ /TFIX-F6$_{(WHITE)}$ is a single component, high performance, flexible tile adhesive consists of distinguished blend of cement, well graded minerals and high content of modified polymers that forms when mixed with water an outstanding tile adhesive that capable for fixing all types of heavy or large ceramic tiles and natural stone on all common construction substrates that may be subjected to vibration or limited deflection internally or externally.

Features and Benefits

- Excellent shrinkage and crack resistance
- Ultimate stability & dual bonding strength
- No vertical slip & Highly flexible
- Ultra high adhesion & flexural strength

Instructions for Use

- Clean and prepare the substrate, ensuring it is free from dust, dirt, and other contaminants.
- Mix the adhesive with water at a ratio of 1:4 by weight until a smooth, lump-free consistency is achieved.
- Apply the adhesive to the substrate using a notched trowel, ensuring full coverage.
- Lay the tiles into the adhesive, pressing firmly and ensuring they are level.
- Allow the adhesive to dry for at least 24 hours before allowing light foot traffic.
- Grout the tiles using a suitable grout after the adhesive has fully cured.

Technical Data

Appearance	Grey/White powdered mixture
Adjustability	~30 ± 5 minutes
Open Time	~45 ± 5 minutes
Pot life	~60 ± 30 minutes
Shear Strength	> 1.5 N/mm² @ 28 days (Dry Condition)
Tensile Strength	> 1.5 N/mm² (28 days) (Dry Condition)
Deformability	≥ 2.5 mm & < 5 mm
Time to Traffic	~24 Hours
Water Demand	~25 ± 5% by weight of powder
Shelf Life	12 months from the date of manufacturing
Coverage	~50 - 60 square feet /25 kg bag (For, 3 mm bed thickness)

Safety & Precautions

- Store in cool & dry place.
- Avoid contact with skin and eyes. In case of contact, rinse thoroughly with water and seek medical advice if necessary.
- Ensure good ventilation when using the product.
- Use gloves and eye protection when handling the product.

Disclaimer-Fixup products and recommendations are provided in good faith based on our experience, but they should be treated as indicative only. Users must confirm product suitability for their specific application, as site conditions and workmanship are beyond our control. Final responsibility for results rests solely with the user. For the latest TDS, visit www.fixup.co.in.

TECHNICAL DATA SHEET

ECOFIX 232

Two Part Polyurethane Base Tile & Stone Adhesive



Description

Fixup® EcoFix 232 is a two-part polyurethane tile adhesive, a high-performance solution for bonding ceramic, vitrified, natural stone, and speciality tiles on challenging substrates—including metal, plywood, drywall, and even heated subfloors.

Engineered for reliability in both interiors and exteriors, this adhesive delivers exceptional flexibility, waterproofing, and chemical resistance.

Features and Benefits

- Superior Bond Strength
- Exceptional Flexibility
- Waterproof & Chemical Resistant
- Broad Substrate Compatibility

Instructions for Use

- Ensure substrates are dry, clean, and free from grease, oil, or dust.
- Add full quantity of Part B (Hardener) to Part A (Resin); mix mechanically for 3–5 minutes until uniform.
- Apply using a notched trowel, ensuring recommended bed thickness.
- Allow open time as specified; place tiles within this window, adjusting as needed.
- Clean tools with suitable solvents before adhesive cures.

Technical Data

Property	Value/Range
Appearance	Off-white to white paste (Mixed)
Mixed Density	1610-1710 kg/m3
Open Time	>60 min.
Pot Life	~40 - 60 min
Cure Time	~24 hours
Application Temperature	10 °C - 40 °C
Shelf Life	12 months
Coverage	4-5 sq. ft./ kg 1.5 mm bed thickness (3X3 mm notch trowel)

Safety & Precautions

- Store in cool & dry place.
- Avoid contact with skin and eyes. In case of contact, rinse thoroughly with water and seek medical advice if necessary.
- Ensure good ventilation when using the product.
- Use gloves and eye protection when handling the product.

Disclaimer-Fixup products and recommendations are provided in good faith based on our experience, but they should be treated as indicative only. Users must confirm product suitability for their specific application, as site conditions and workmanship are beyond our control. Final responsibility for results rests solely with the user. For the latest TDS, visit www.fixup.co.in.

TECHNICAL DATA SHEET

BLOCK BOND

Polymer modified, cement based block jointing mortar



Description

Fixup® block bond is a blend of Portland cement, graded aggregates, polymers, and additives designed for thin jointing (usually 2–5 mm) of AAC, lightweight, cement, or fly ash blocks. The product enables speedier construction, improved masonry strength, and enhanced water resistance.

Features and Benefits

- High bond strength and load-bearing capacity
- Thin jointing (2–5mm), reducing material usage
- No water curing required post-application
- Fast application and long working time
- Flexibility and impact resistance
- Suitable for both interior and exterior use

Instructions for Use

- Mix powder with clean water as per specified ratio (typically 3:1 by volume or as manufacturer specifies) to a lump-free, thixotropic paste.
- Apply with trowel in 2–5 mm thick beds. Place block and tap gently for alignment.
- Clean excess adhesive immediately from block edges and tools.
- Ready for plastering or further application after ~24 hours.

Technical Data


Appearance	Grey Cementitious Powder
Water-Adhesive Mixing Ratio	20-25% of weight of powder
Pot Life	~30 min
Open Time	~20 min
Coverage	~9-10 m^2 per 40 kg bag (3 mm bed thickness)
Application Temperature	5°C to 40°C
Curing Time	24 hours
Packing	40 kg Bag
Shelf Life	12 months from date of manufacture

Precautions

- Store in a cool, dry area away from moisture
- In case of contact with skin and eyes, rinse thoroughly with water and seek medical advice if necessary.
- Use gloves and eye protection when handling the product.

Disclaimer-Fixup products and recommendations are provided in good faith based on our experience, but they should be treated as indicative only. Users must confirm product suitability for their specific application, as site conditions and workmanship are beyond our control. Final responsibility for results rests solely with the user. For the latest TDS, visit www.fixup.co.in.

FIXUP

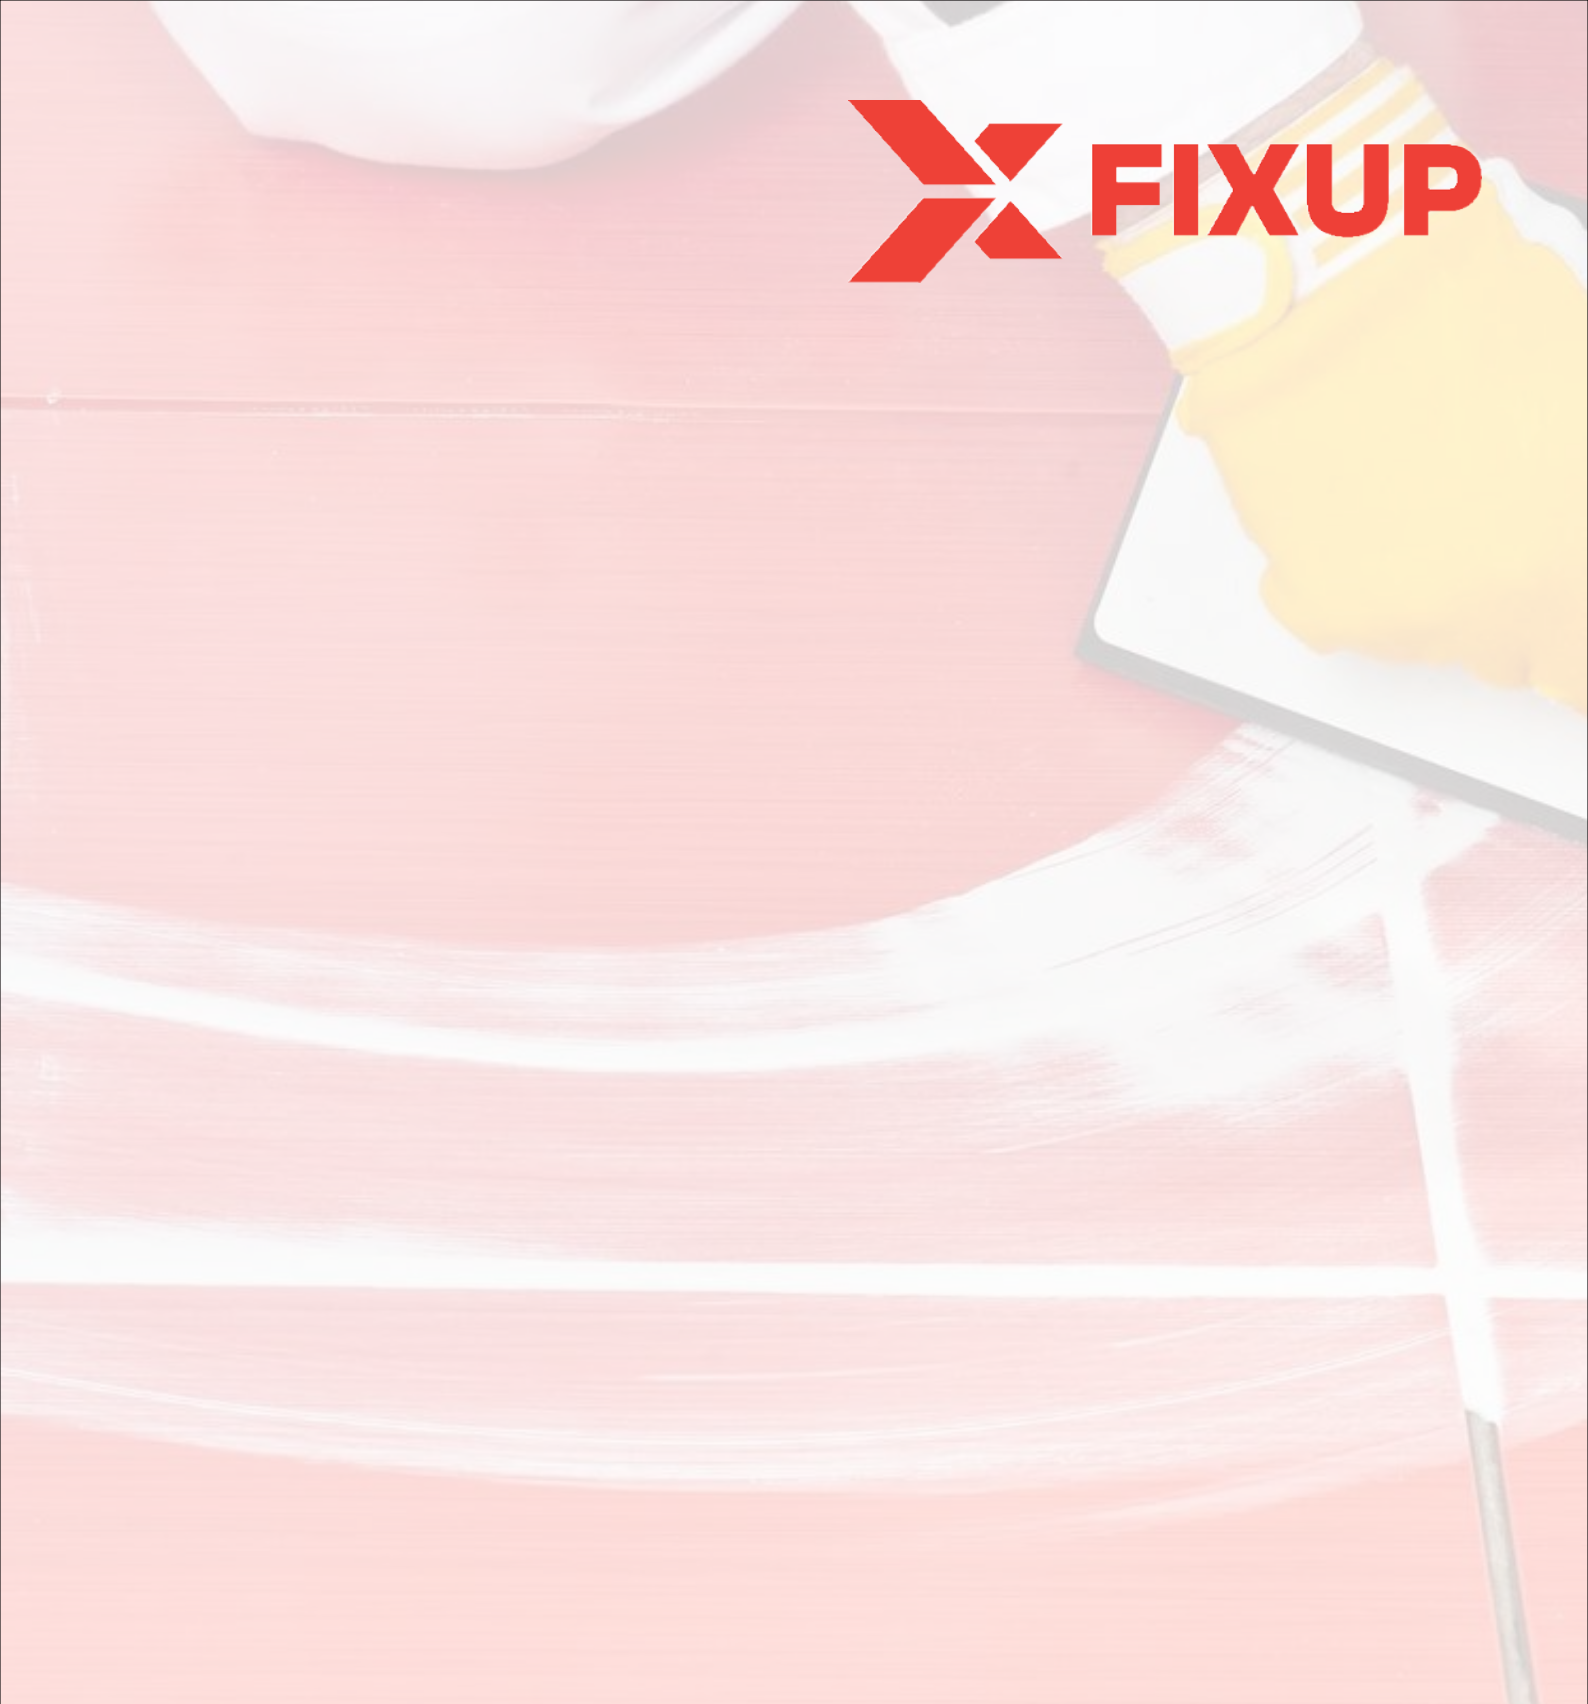

Tile Joint Filler Solutions

TECHNICAL DATA SHEET

EG 303

Three-part Epoxy grout for tiles & marble joints/groove filling



Description

Fixup® EG 303 is a high-performance, high-strength grout designed for use in areas that require superior chemical and stain resistance. The grout is suitable for use on ceramic, porcelain, and natural stone tiles in both interior and exterior applications. It is a water-resistant product that provides a strong, durable bond between the tiles and the substrate.

Features and Benefits

- High chemical, abrasion, and impact resistance
- Waterproof and impermeable to liquids and vapours
- Suitable for joint widths 1 mm to 12 mm
- Available in multiple colour options
- Resistant to a broad range of chemicals including acids, alkalis, and solvents
- Suitable for submerged and high-traffic environments

Instructions for Use

- Ensure tile adhesive has fully cured (typically 24 hours) before grouting
- Clean joints thoroughly from dust, dirt, and adhesive residue
- Mix Part A and Part B uniformly, then slowly add Part C filler until a homogeneous, slump-free paste is obtained
- Apply grout using rubber float to compact fully into tile joints
- Remove excess grout immediately and clean tile surface with a damp sponge before grout stiffens
- Allow grout to cure fully: light foot traffic after 24 hours, full cure in 7 days Ready for plastering or further application after ~24 hours.

Technical Data

Property	Value/Range
Appearance	Paste (Mixed)
Mixing Ratio	2:1:7 (Hardener : Resin : powder) by weight
Mixed Density	1.70
Pot life @ 30°C	30 - 45 minutes
Compressive strength	>55 N/mm²@ 7days
Flexural strength	> 20 N/mm²@ 7days
Joint Width	Up to 15 mm
Application Temperature	From +5° C to +35° C
Light Foot Traffic	24 hours

Precautions

- Store in a cool, dry area away from moisture
- In case of contact with skin and eyes, rinse thoroughly with water and seek medical advice if necessary.
- Use gloves and eye protection when handling the product.

Disclaimer-Fixup products and recommendations are provided in good faith based on our experience, but they should be treated as indicative only. Users must confirm product suitability for their specific application, as site conditions and workmanship are beyond our control. Final responsibility for results rests solely with the user. For the latest TDS, visit www.fixup.co.in.

TECHNICAL DATA SHEET

PG 101

Polymer modified cement based grout for tiles joints/groove filling



Description

Fixup® PG 101 is a versatile and durable solution for filling joints and gaps. It improves the adhesion, flexibility, and resistance to cracking and shrinkage of the grout.

Features and Benefits

- Good bond strength and adhesion
- Water resistant and low permeability
- Suitable for use in tropical conditions
- Available in various colours
- UV, mould and fungus resistant
- Easy mixing and application (add only water)
- For joint widths of 1–6 mm

Instructions for Use

- Ensure that the surface to be grouted is clean and free from dust, oil, and other contaminants.
- Mix the polymer modified cement grout with water according to the manufacturer's instructions
- Apply the grout using a grouting pump or a trowel, ensuring that all voids are filled.
- Compact the grout to ensure full penetration and to eliminate air pockets.
- Allow the grout to cure for the recommended time, keeping it moist and protected from excessive heat and cold.
- After the grout has cured, clean the surface and remove any excess grout using a grout sponge or a damp cloth.

Technical Data

Property	Value/Range
Appearance	Fine Powder
Mixed Density	1.60 ± 0.05 kg/ litre
Pot life @ 30°C	60 minutes
Joint Width	Up to 3 mm
Sag Resistant	Non-sag
Application Temperature	From +10° C to +35° C
Light Foot Traffic	24 hours
Packing	1 kg, 5 kg & 40 kg

Precautions

- Store in a cool, dry area away from moisture
- In case of contact with skin and eyes, rinse thoroughly with water and seek medical advice if necessary.
- Use gloves and eye protection when handling the product.

Disclaimer-Fixup products and recommendations are provided in good faith based on our experience, but they should be treated as indicative only. Users must confirm product suitability for their specific application, as site conditions and workmanship are beyond our control. Final responsibility for results rests solely with the user. For the latest TDS, visit www.fixup.co.in.

TECHNICAL DATA SHEET

GA 102

A liquid admixture designed to enhance the performance of cementitious grouts



Description

Fixup® GA-102 is a is a chemical additive designed to enhance the performance of cement-based grouts. It is formulated to accelerate the setting and curing process of cementitious grouts, improving their strength, durability, and bonding properties

Features and Benefits

- Improved workability of grout.
- Increased early and ultimate strength.
- Enhanced bond strength to substrate.
- Improved water resistance and permeability.
- Reduced shrinkage.

Instructions for Use

- Ensure the substrate surface is clean, dry, and free from any contaminants.
- Mix Fixup® GA-102 with the required amount of water according to the recommended dosage.
- Add the mixture to the cement-based grout powder and mix thoroughly until a uniform consistency is achieved.
- Apply the activated grout mixture onto the prepared substrate using appropriate tools.

Technical Data

Property	Value/Range
Appearance	Liquid
Colour	Milky White
pH	8.0 - 10.0
Specific Gravity @25 °C	1.02 – 1.04
Solubility	Soluble in water
Recommended Dosage	200-250 ml per 1 kg cement grout
Packing	250ML & 1L
Property	Value/Range

Precautions

- Store in a cool, dry area away from moisture
- In case of contact with skin and eyes, rinse thoroughly with water and seek medical advice if necessary.
- Use gloves and eye protection when handling the product.

Disclaimer-Fixup products and recommendations are provided in good faith based on our experience, but they should be treated as indicative only. Users must confirm product suitability for their specific application, as site conditions and workmanship are beyond our control. Final responsibility for results rests solely with the user. For the latest TDS, visit www.fixup.co.in.

FIXUP



Waterproofing Solutions

TECHNICAL DATA SHEET

ULTRACOAT PLUS

Two-part solution for Waterproofing



Description

Fixup® Ultracoat Plus is a two-part waterproofing system is engineered to safeguard your home, commercial space, or any structure against the relentless forces of water, moisture, and humidity. Fixup® Ultracoat Plus is a high-performance, elastomeric coating that forms a durable and impenetrable barrier on various surfaces.

Features and Benefits

- High flexibility with excellent crack bridging ability
- Strong adhesion to various substrates, including slightly damp surfaces
- Resistant to water penetration, humidity, and chemical attack
- Breathable membrane allowing moisture vapour transmission
- Easy to apply with brush, roller, or trowel
- Non-toxic, solvent-free formulation

Instructions for Use

- Substrate must be clean, structurally sound, and free of contaminants like dust, oil, grease, wax, and loose particles.
- Fill cracks and joints with suitable repair mortar and pre-wet the substrate to a saturated surface dry (SSD) condition.
- Gradually add Part B (powder) into Part A while mixing with a low-speed drill until a homogenous, lump-free slurry is obtained.
- Apply the first coat using a brush, roller, or trowel uniformly at the recommended thickness.
- Allow the first coat to dry for 4-6 hours or as specified.
- Apply the second coat at right angles to the first to ensure full coverage and uniform thickness.
- For heavy-duty applications, a third coat may be applied.

Technical Data

Property	Value/Range
Appearance	Liquid(Part A) & Powder(Part B)
Mixing Ratio	1 : 2 (A : B)
Drying Time (Touch Dry)	3 to 4 hours
Tensile Strength	2.5 N/mm2
Elongation at Break	>60%
Adhesion Strength	>1.0 N/mm2
Water Absorption	<5%
Crack Bridging Ability	Up to 2 mm

Precautions

- Store in a cool, dry area away from moisture
- In case of contact with skin and eyes, rinse thoroughly with water and seek medical advice if necessary.
- Use gloves and eye protection when handling the product.

Disclaimer-Fixup products and recommendations are provided in good faith based on our experience, but they should be treated as indicative only. Users must confirm product suitability for their specific application, as site conditions and workmanship are beyond our control. Final responsibility for results rests solely with the user. For the latest TDS, visit www.fixup.co.in.

TECHNICAL DATA SHEET

SAFEGUARD 247

Single part liquid acrylic waterproofing coat.



Description

Fixup® SAFEGUARD 247 is a high-performance, single-component elastomeric coating designed to provide superior heat resistance and damp-proof protection for construction applications. Formulated with advanced polymer technology, it withstands high temperatures while preventing water ingress, making it ideal for residential and commercial surfaces.

Features and Benefits

- Ready-to-use, no mixing required.
- Reduces temperatures up to 5°C.
- Forms a waterproof barrier, preventing moisture penetration.
- Protects against UV rays, preventing surface degradation.
- Expands and contracts with substrate movement.
- Can be applied by brush or roller.

Instructions for Use

- Ensure surfaces are clean, dry, and free from dust, grease, and loose particles. Repair cracks and joints before application.
- Stir well before use. Do not dilute unless specified.
- Apply using a brush or roller in two or more coats with a drying time of 6-8 hours between coats.
- Allow a minimum of 24 hours for full curing before exposing to water.
- Absorbent surfaces may require more material.

Where to Use

- Roofs, terraces, and balconies
- External and internal walls
- Waterproofing and heat proofing for concrete surfaces

Technical Data

Property	Value/Range
Appearance	White liquid
Specific Gravity	1.1-1.2 g/cm³
Drying Time	Touch dry: 6-8 hours, Full cure: 24 hours
Water Absorption	<1%
Crack Bridging Ability	Up to 1 mm
Adhesion Strength	>1.5 MPa
Coverage	~10-12 ft² per litre

Precautions

- Store in a cool, dry area away from moisture
- In case of contact with skin and eyes, rinse thoroughly with water and seek medical advice if necessary.
- Use gloves and eye protection when handling the product.

Disclaimer-Fixup products and recommendations are provided in good faith based on our experience, but they should be treated as indicative only. Users must confirm product suitability for their specific application, as site conditions and workmanship are beyond our control. Final responsibility for results rests solely with the user. For the latest TDS, visit www.fixup.co.in.

FIXUP



Concrete Care Solutions

TECHNICAL DATA SHEET

CRETEFIX 200

Integral waterproofing compound for concrete



Description

Fixup® CRETEFIX 200 concrete admixture is used to reduce the amount of water used in concrete mixes while maintaining or improving workability. It increases the strength, permeability, adhesion and durability properties while reducing shrinkage cracking potential.

Features and Benefits

- Enhances concrete workability and flow without extra water
- Lowers water demand, boosts strength and reduces hair cracks.
- Improves surface finish quality

Instructions for Use

- Recommended dosage: 150-200 ml per 50 kg cement bag
- Add CRETEFIX 200 to mixing water or directly to concrete mixer
- Mix thoroughly to ensure even distribution
- Conduct trial mixes to find optimal dosage for specific application
- Test concrete to meet required strength and workability
- Adjust dosage if necessary to achieve desired properties
- Avoid overdosing to prevent issues like bleeding
- Use proper safety precautions when handling the admixture

Technical Data

Appearance	Free flowing liquid
Colour	Brown
pH	7.0 - 9.0
Specific Gravity @25 °C	1.0 – 1.1
Solubility	Soluble in water
Recommended Dosage	150-200 ml per 50kg cement bag
Packing	1L, 5L & 20L
Appearance	Free flowing liquid
Colour	Brown

Safety & Precautions

- Store in cool & dry place.
- Avoid contact with skin and eyes. In case of contact, rinse thoroughly with water and seek medical advice if necessary.
- Ensure good ventilation when using the product.
- Use gloves and eye protection when handling the product.

Disclaimer-Fixup products and recommendations are provided in good faith based on our experience, but they should be treated as indicative only. Users must confirm product suitability for their specific application, as site conditions and workmanship are beyond our control. Final responsibility for results rests solely with the user. For the latest TDS, visit www.fixup.co.in.

TECHNICAL DATA SHEET

PLASTOFIX 100

Integral waterproofing compound for plaster



Description

Fixup® PLASTOFIX 100 is a high-performance plaster admixture designed to enhance workability and durability in cement-based plaster applications. It improves cohesion, reduces plastic shrinkage and increases the ease of application, ensuring a smooth, crack-resistant finish.

Features and Benefits

- Enhances plaster consistency and application ease.
- Helps achieve the desired consistency with less water.
- Reduces the risk of cracks due to plastic shrinkage.
- Improves long-term strength and resistance to weathering.

Instructions for Use

- Add the recommended dosage directly into the mixing water before incorporating into the plaster mix.
- Ensure uniform dispersion by mixing thoroughly for 3-5 minutes.
- Apply the plaster mix using traditional tools or spray application methods.
- Follow standard curing practices to achieve optimum strength and durability.

Technical Data

Appearance	Brown liquid
Ph	7.0 – 9.0
Specific Gravity @25 °C	1.0 – 1.1
Solubility	Soluble in water
Chloride Content	Nil
Compatibility	Compatible with all types of Portland cement
Recommended Dosage	80 - 100 gm per 50kg cement bag
Packing	5 kg, 20 kg

Safety & Precautions

- Store in cool & dry place.
- Avoid contact with skin and eyes. In case of contact, rinse thoroughly with water and seek medical advice if necessary.
- Ensure good ventilation when using the product.
- Use gloves and eye protection when handling the product.

Disclaimer-Fixup products and recommendations are provided in good faith based on our experience, but they should be treated as indicative only. Users must confirm product suitability for their specific application, as site conditions and workmanship are beyond our control. Final responsibility for results rests solely with the user. For the latest TDS, visit www.fixup.co.in.

FIXUP



Repairing & Maintenance Solutions

TECHNICAL DATA SHEET

OMNIFIX 360(SBR)

Multipurpose solution for Waterproofing & repairing



Description

Fixup® OMNIFIX 360 (SBR) is a high-quality, synthetic latex polymer primarily used in the construction industry for various applications, including concrete and mortar modification, waterproofing, bonding agents, and more.

Features and Benefits

- Improves adhesion to various substrates
- Enhances flexural and tensile strength of mortar and concrete
- Reduces shrinkage and cracking
- Enhances durability and weather resistance
- Provides excellent water resistance
- Improves workability and rheological properties
- Compatible with cementitious materials

Instructions for Use

Application	OMNIFIX 360 (SBR)	Water:Cement:Sand (Approximate Coverage per coat)
Waterproof Coat	1	1.5:5:0 (~7.43 gm/sq.ft.)
Bonding Coat	1	1:4:0 (~4.64 gm/sq.ft.)
Repair mortar	1	1:3:9 (~6.5 gm/sq.ft. per mm thickness)
Crack filling	1	2:0.5:1.5 (~ 4 gm for 8–10 mm groove)

Technical Data

Property	Value/Range
Appearance	Liquid
Colour	Milky White
pH	8.0 - 10.0
Specific Gravity @25 °C	1.02 – 1.04
Solubility	Soluble in water
Packing	1L, 5L & 20L
Appearance	Liquid

Safety & Precautions

- Store in a cool, dry area away from moisture
- In case of contact with skin and eyes, rinse thoroughly with water and seek medical advice if necessary.
- Use gloves and eye protection when handling the product.

Disclaimer-Fixup products and recommendations are provided in good faith based on our experience, but they should be treated as indicative only. Users must confirm product suitability for their specific application, as site conditions and workmanship are beyond our control. Final responsibility for results rests solely with the user. For the latest TDS, visit www.fixup.co.in.

TECHNICAL DATA SHEET

KRACKFIX

Polymer-Modified White-Cement Based Crack Fill Powder



Description

Fixup® KRACKFIX is a high-performance, polymer-modified white cement-based crack filler powder designed for interior and exterior applications. This easy-to-use, white powder is specially formulated to repair cracks up to 3 mm and minor surface defects in plaster, concrete, and masonry walls, providing a smooth, durable, and paintable finish.

Features and Benefits

- Bonds well with concrete, plaster, and masonry.
- Prevents further cracking and shrinkage.
- Protects against moisture ingress.
- Can be applied with a putty knife or trowel.
- Quick-drying for faster project completion.

Instructions for Use

- Ensure the surface is clean, dry, and free from dust, grease, and loose materials.
- Gradually add the powder to water and mix thoroughly until a smooth, lump-free paste is formed. Avoid excessive water.
- Apply the paste using a putty knife or trowel, pressing it firmly into the cracks.
- Smooth out the surface with a damp sponge or trowel. Allow to dry completely before painting or further finishing.
- No water curing is required, but avoid exposure to direct water for 24 hours.

Technical Data

Property	Value/Range
Appearance	White Cementitious Powder
Mixed Density	1.60 ± 0.05 kg/ litre
Pot life @ 30°C	30-45 minutes
Crack filling size	Up to 3 mm
Sag Resistant	Non-sag
Water Absorption	<2%
Paint ability	Excellent

Safety & Precautions

- Store in a cool, dry area away from moisture
- In case of contact with skin and eyes, rinse thoroughly with water and seek medical advice if necessary.
- Use gloves and eye protection when handling the product.

Disclaimer-Fixup products and recommendations are provided in good faith based on our experience, but they should be treated as indicative only. Users must confirm product suitability for their specific application, as site conditions and workmanship are beyond our control. Final responsibility for results rests solely with the user. For the latest TDS, visit www.fixup.co.in.

TECHNICAL DATA SHEET

COREFIX 360

Free flow, high strength, non-shrink cementitious precision grout



Description

Fixup® COREFIX 360 is a high-performance, free-flowing, non-shrink cementitious grout formulated for sealing pipe core-cut openings in concrete slabs and walls. This advanced grout provides exceptional strength, fluidity, and volume stability, ensuring complete gap filling and long-term durability in horizontal and vertical applications.

Features and Benefits

- High Strength & Durability
- Ensures deep penetration and complete gap filling.
- Resists moisture ingress.
- Quick application and strong adhesion to concrete.

Instructions for Use

- Ensure the substrate is clean, sound, and free from dust, grease, and loose materials. Pre-wet the area but remove standing water.
- Gradually add the grout powder to clean water while continuously mixing until a smooth, homogeneous, flow able consistency is achieved.
- Pour the mixed grout directly into the core-cut opening, ensuring complete filling without air entrapment. For vertical applications, use formwork to contain the grout.
- Protect the applied grout from premature drying. Keep moist for at least 48 hours for optimal strength development.

Technical Data

Appearance	**Grey Powdered Mixture**
Wet Density	2200 ± 100 Kg/m³
Consistency **Pourable** **Flow able** **Free flow**	**Water / Powder Ratio** 0.16 0.17 0.18
Flow	190-220 mm
Tensile strength	>3.5N/mm² @ 28 days
Compressive Strength	>65 N/mm² @ 28 days
Flexural strength	>10 N/mm² @ 28 days
Packing size	5 kg

Precautions

- Store in a cool, dry area away from moisture
- In case of contact with skin and eyes, rinse thoroughly with water and seek medical advice if necessary.
- Use gloves and eye protection when handling the product.

Disclaimer-Fixup products and recommendations are provided in good faith based on our experience, but they should be treated as indicative only. Users must confirm product suitability for their specific application, as site conditions and workmanship are beyond our control. Final responsibility for results rests solely with the user. For the latest TDS, visit www.fixup.co.in.

TECHNICAL DATA SHEET

RAPIDGRIP X2

Two-Part Free-Flow Epoxy Core Sealant



Description

Fixup® RAPIDGRIP X2 is a high-performance, two-component, free-flowing epoxy sealant designed for sealing pipe core-cut openings in concrete slabs and walls. It effectively prevents water ingress by forming a watertight bond between pipes and concrete. The self-levelling formulation ensures deep penetration into gaps, making it ideal for both horizontal and vertical applications.

Features and Benefits

- Two-Component Epoxy System which provides strong adhesion and durability.
- Free-Flowing & Self-Levelling properties ensures complete gap filling.
- Prevents moisture penetration and withstands harsh environments.
- Non-Shrink & Crack Resistant.
- Develops strength within 24-48 hours.
- Suitable for Horizontal & Vertical Core Cuts.

Instructions for Use

- Ensure the area is clean, dry, and free from dust, grease, and loose materials. Roughen the surface for better adhesion if necessary.
- Mix Part A (Resin) and Part B (Hardener) thoroughly as per the recommended ratio until a uniform consistency is achieved.
- Pour the mixed sealant directly into the gap or joint. For vertical applications, use formwork to prevent flow.
- Allow to cure for min. 24 hours for better results.
- Clean tools and spills immediately with an appropriate solvent.

Technical Data

Property	Value/Range
Appearance	Part A-Resin: Off white Part B-Hardener: Beige
Viscosity @25°C (mPa.s)	Part A-Resin: 11000-15000 Part B-Hardener: 7000-10500
Density @25°C (g/cc)	Part A-Resin: 1.45-1.57 Part B-Hardener: 1.30-1.38
Odour	Yes
Mix Ratio	1:0.8 (Resin: Hardener) by weight
Pot Life @25°C	45-60 minutes
Curing Time	Touch dry: 4-6 hours, Full cure: 24-48 hours
Compressive Strength	>65 MPa
Tensile Strength	>25 MPa
Flexural Strength	>20 MPa
Adhesion Strength	> (Substrate Failure)
Water Absorption	Nil
Packing	225 g, 1.8 kg, 9 kg

Precautions

- Store in a cool, dry area away from moisture
- In case of contact with skin and eyes, rinse thoroughly with water and seek medical advice if necessary.
- Use gloves and eye protection when handling the product.

Disclaimer-Fixup products and recommendations are provided in good faith based on our experience, but they should be treated as indicative only. Users must confirm product suitability for their specific application, as site conditions and workmanship are beyond our control. Final responsibility for results rests solely with the user. For the latest TDS, visit www.fixup.co.in.



FIXUP

Industrial Solutions

TECHNICAL DATA SHEET

FLOWFIX GP

Free flow, high strength, non-shrink cementitious precision grout



Description

Fixup® FLOWFIX GP is free flow non-shrink cementitious grout which is one-component, ready-to-mix, and free-flowing. It contains a unique shrinkage compensating mechanism to ensure that it maintains its volume once set. It is commonly used for grouting applications where high fluidity, strength, and durability are essential.

Features and Benefits

- Enhanced Structural Integrity
- Precise Placement
- Time and Labour Savings
- Long-Term Performance
- Minimized Maintenance
- Versatile Applications

Instructions for Use

- Clean and prepare the substrate; ensure it is dry, sound, and free from dust, oil, or grease.
- Add grout powder slowly to water while mixing to obtain a smooth, lump-free consistency.
- Pour the mixed grout into the area, ensuring complete filling of gaps and voids.
- Compact the grout using a trowel to remove air pockets and ensure proper bonding.
- Place bolts or equipment while the grout is still workable, if required.
- Level and finish the surface with a trowel as needed.
- Protect the grout during curing and clean tools immediately after use.

Technical Data

Appearance	Grey Powdered Mixture
Wet Density	2200 ± 100 Kg/m³
Consistency Pourable Flow able Free flow	**Water / Powder Ratio** 0.16 0.17 0.18
Flow	190-220 mm
Tensile strength	>3.5N/mm2 @ 28 days
Compressive Strength	>65 N/mm2 @ 28 days
Flexural strength	>10 N/mm2 @ 28 days
Packing size	25 kg
Shelf Life	12 months from the date of manufacturing

Precautions

- Store in a cool, dry area away from moisture
- In case of contact with skin and eyes, rinse thoroughly with water and seek medical advice if necessary.
- Use gloves and eye protection when handling the product.

Disclaimer-Fixup products and recommendations are provided in good faith based on our experience, but they should be treated as indicative only. Users must confirm product suitability for their specific application, as site conditions and workmanship are beyond our control. Final responsibility for results rests solely with the user. For the latest TDS, visit www.fixup.co.in.

TECHNICAL DATA SHEET

FLOOR FIX

High performance non-metallic surface hardener



Description

Fixup® FLOOR FIX is a premium quality, non-metallic, dry shake floor hardener designed to enhance the durability, abrasion resistance, and overall performance of concrete floors. It is formulated with carefully selected aggregates, cementitious binders, and additives to provide excellent surface hardness and wear resistance.

Features and Benefits

Improves abrasion resistance of concrete floors
Enhances surface hardness
Provides a dust-free and durable floor surface
Non-metallic formulation eliminates the risk of rust stains
Suitable for industrial, commercial, and residential applications

Instructions for Use

- Ensure the concrete surface is clean, sound, and free from dust, oil, curing compounds, or loose particles.
- Apply the non-metallic floor hardener as a dry shake over freshly poured, workable concrete.
- Calculate and prepare the required quantity as per recommended coverage.
- Sprinkle the hardener evenly (by hand or mechanical spreader) to ensure uniform coverage; work in sections for large areas.
- Allow bleed water to evaporate.
- Float or trowel the surface to embed the hardener properly into the concrete.
- Finish with hand, power, or steel trowel to achieve the desired texture, avoiding overworking.

Technical Data

Appearance	Grey Powdered Mixture
Adjustability	15 ± 5 minutes
Bulk Density	1500 ± 100 Kg/m³
Surface hardness	Between 8 and 9 (Moh's scale)
Compressive Strength	≥ 70 N/mm2
Time to Traffic	~72 Hours
Application Light duty Medium duty Heavy duty	**Consumption** 3.5–4.0 kg/m2 4.5–5.0 kg/m2 5.5–6.0 kg/m2
Packing	25 kg Bag
Shelf Life	12 months from date of manufacture

Precautions

- Store in a cool, dry area away from moisture
- In case of contact with skin and eyes, rinse thoroughly with water and seek medical advice if necessary.
- Use gloves and eye protection when handling the product.

Disclaimer-Fixup products and recommendations are provided in good faith based on our experience, but they should be treated as indicative only. Users must confirm product suitability for their specific application, as site conditions and workmanship are beyond our control. Final responsibility for results rests solely with the user. For the latest TDS, visit www.fixup.co.in.

FIXUP



Cleaning Solutions

TECHNICAL DATA SHEET

CLEANFIX 998

Multipurpose cleaner for stone and ceramic & vitrified tiles



Description

Fixup® CLEANFIX 998 is a specially formulated acid-based cleaner designed to remove stains, dirt, grime, and cement residues from tiles, marble, granite, and other stone surfaces. Suitable for post-construction cleaning, regular maintenance, and deep stain removal, this cleaner ensures long-lasting cleanliness and hygiene for tiled areas.

Features and Benefits

- Effectively removes dirt, grime, and tough stains.
- Safe for most tiles and stones when used as directed.
- Works quickly to restore the original appearance of surfaces.
- Ideal for post-construction cleaning.
- Strong enough for deep cleaning but safe with proper dilution

Instructions for Use

- Sweep or dry-clean the surface to remove loose dust and debris.
- Mix the cleaner with water in the recommended ratio. For heavy stains, use a stronger mix (1:4 ratio); for regular maintenance, use a weaker mix (1:10 ratio).
- Apply the solution using a mop, sponge, or brush, ensuring even coverage.
- For tough stains, scrub gently with a soft brush or scrub pad.
- Rinse thoroughly with clean water to remove any residue.
- Allow the surface to air dry before use.

Technical Data

Appearance	Coloured Liquid
pH	1.5-3.0 (Acidic)
Specific Gravity @25 °C	1.05 – 1.1
Solubility	Soluble in water
Dilution Ratio	1:4 to 1:10 (Cleaner: Water)
Packing	1L, 5L & 20L

Precautions

- Store in a cool, dry area away from moisture
- In case of contact with skin and eyes, rinse thoroughly with water and seek medical advice if necessary.
- Use gloves and eye protection when handling the product.

Disclaimer-Fixup products and recommendations are provided in good faith based on our experience, but they should be treated as indicative only. Users must confirm product suitability for their specific application, as site conditions and workmanship are beyond our control. Final responsibility for results rests solely with the user. For the latest TDS, visit www.fixup.co.in.

FIXUP

OUR SOLUTIONS

TILE & STONE ADHESIVE
TILE JOINT FILLER
WATERPROOFING
CONCRETE CARE
REPAIRING & MAINTENANCE
INIDUSTRIAL
CLEANING

fixup.co.in